

R3528BRGBC-001

3.5x2.8mm, Multi-color LED

Surface Mount PLCC-6 LED Indicator

LuckyLight

Technical Data Sheet

Features:

- PLCC-6 package.
- White package.
- Optical indicator.
- Colorless clear window.
- Ideal for backlight and light pipe application.
- Wide viewing angle.
- Suitable for automatic placement equipment.
- Available on tape and reel (8mm Tape).
- The product itself will remain within RoHS compliant Version.

Descriptions:

- The R3528 series is available in soft red, orange, yellow, green, blue and white. Due to the package design, the LED has wide viewing angle and optimized light coupling by inter reflector. This feature makes the SMT TOP LED ideal for light pipe application. The low current requirement makes this device ideal for portable equipment or any other application where power is at a premium.

Applications:

- Backlight in dashboards and switches.
- Telecommunication: Indicator and backlight in telephone and fax.
- Indicator and backlight for audio and video equipment.
- Indicator and backlight in office and family equipment.
- Flat backlight for LCD's, switches and symbols.
- Light pipe application.
- General use.

R3528BRGBC-001

3.5x2.8mm, Multi-color LED



Surface Mount PLCC-6 LED Indicator





Technical Data Sheet

| Part No. | Emitting Color | Lens Color |
|----------------|----------------|-------------|
| R3528BRGBC-001 | R Red | Water Clear |
| | G Pure Green | |
| | B Blue | |


Package Dimension:



Polarity



Recommended Soldering Pad Dimensions

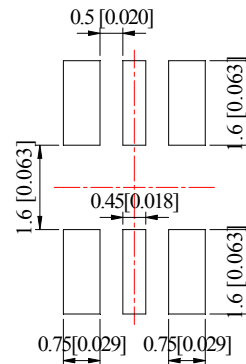

Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is ± 0.25 mm (.010") unless otherwise noted.
3. Protruded resin under flange is 1.00mm (.039") max.

R3528BRGBC-001

3.5x2.8mm, Multi-color LED

Surface Mount PLCC-6 LED Indicator

LuckyLight

Technical Data Sheet

Absolute Maximum Ratings at Ta=25°C

| Parameters | | Symbol | Max. | Unit |
|---|---|--------|---------------------|------|
| Power Dissipation | R | PD | 60 | mW |
| | G | | | |
| | B | | | |
| Peak Forward Current (Per Chip) ^(a) | | IFP | 100 | mA |
| Forward Current (Per Chip) ^(b) | R | IF | 25 | mA |
| | G | | | |
| | B | | | |
| Reverse Voltage (Per Chip) | | VR | 5 | V |
| Electrostatic Discharge (HBM) | R | ESD | 2000 | V |
| | G | | | |
| | B | | | |
| Operating Temperature Range | | Topr | -40°C to +85°C | |
| Storage Temperature Range | | Tstg | -40°C to +100°C | |
| Lead Soldering Temperature [4mm (.157") From Body] | | Tsld | 250°C for 5 Seconds | |

Notes:

- Derate linearly as shown in derating curve.
- Duty Factor = 10%, Frequency = 1 kHz.

R3528BRGBC-001

3.5x2.8mm, Multi-color LED

Surface Mount PLCC-6 LED Indicator



Technical Data Sheet

Electrical Optical Characteristics at Ta=25°C

| Parameters | Symbol | Emitting Color | Min. | Typ. | Max. | Unit | Test Condition |
|------------------------------------|-------------------|----------------|------|------|------|------|--------------------|
| Luminous Intensity ^(a) | IV | R | 400 | 600 | --- | mcd | IF=20mA |
| | | G | 1200 | 1500 | --- | | |
| | | B | 300 | 500 | --- | | |
| Viewing Angle ^(b) | 2θ _{1/2} | R | --- | 120 | --- | Deg | IF=20mA |
| | | G | --- | 120 | --- | | |
| | | B | --- | 120 | --- | | |
| Peak Emission Wavelength | λ _p | R | --- | 632 | --- | nm | IF=20mA |
| | | G | --- | 520 | --- | | |
| | | B | --- | 468 | --- | | |
| Dominant Wavelength ^(c) | λ _d | R | --- | 624 | --- | nm | IF=20mA |
| | | G | --- | 525 | --- | | |
| | | B | --- | 470 | --- | | |
| Spectral Line Half-Width | Δλ | R | --- | 20 | --- | nm | IF=20mA |
| | | G | --- | 35 | --- | | |
| | | B | --- | 25 | --- | | |
| Forward Voltage | VF | R | 1.60 | 2.00 | 2.40 | V | IF=20mA |
| | | G | 2.80 | 3.20 | 3.60 | | |
| | | B | 2.80 | 3.20 | 3.60 | | |
| Reverse Current | IR | R | --- | --- | 10 | μA | V _R =5V |
| | | G | --- | --- | 10 | | |
| | | B | --- | --- | 10 | | |

Notes:

- Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
- 2θ_{1/2} is the o-axis angle where the luminous intensity is 1/2 the peak intensity.
- The dominant wavelength (λ_d) is derived from the CIE chromaticity diagram and represents the single wavelength which defines the color of the device.

R3528BRGBC-001

3.5x2.8mm, Multi-color LED







Surface Mount PLCC-6 LED Indicator



Technical Data Sheet

Typical Electrical / Optical Characteristics Curves (25°C Ambient Temperature Unless Otherwise Noted)

Red:

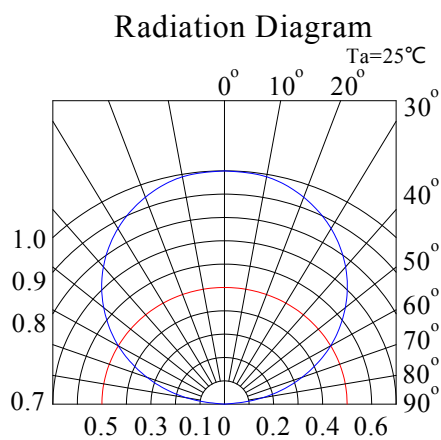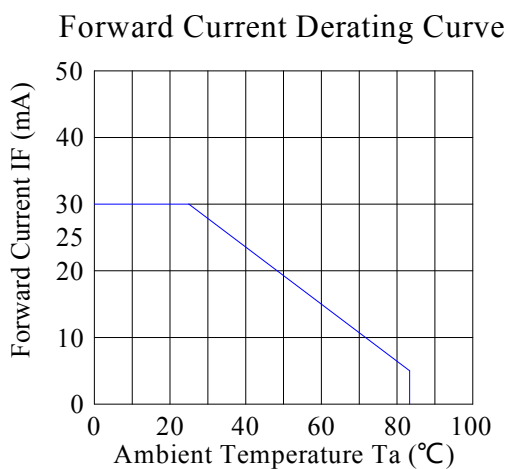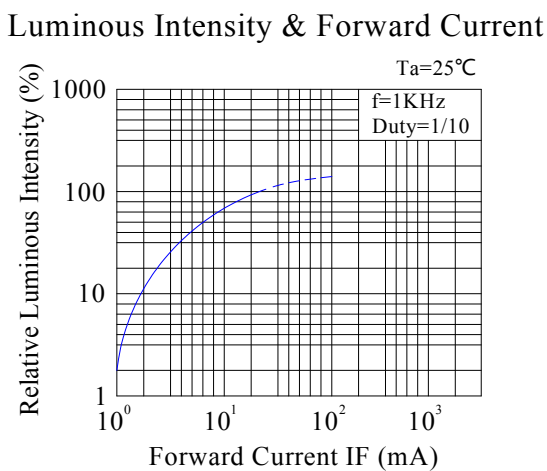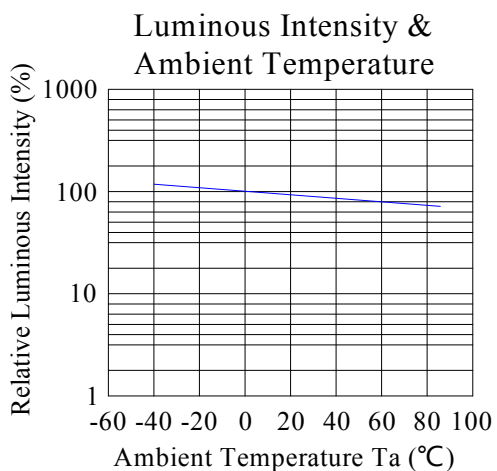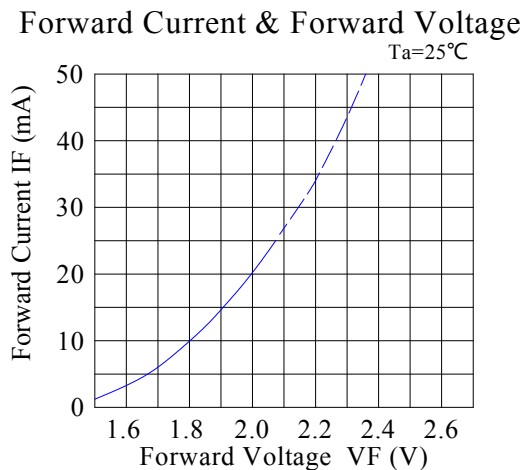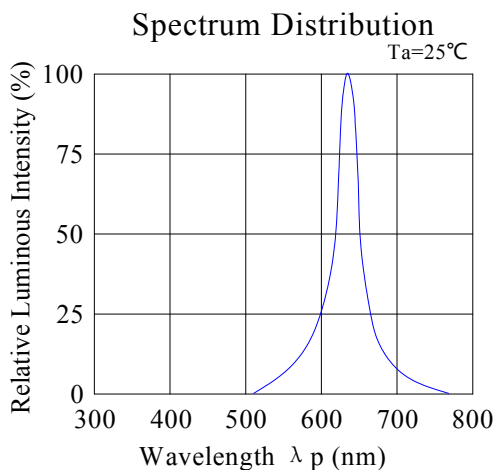

R3528BRGBC-001







3.5x2.8mm, Multi-color LED

Surface Mount PLCC-6 LED Indicator



Technical Data Sheet

Green:

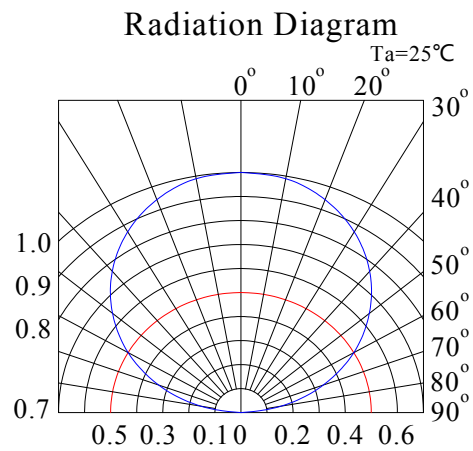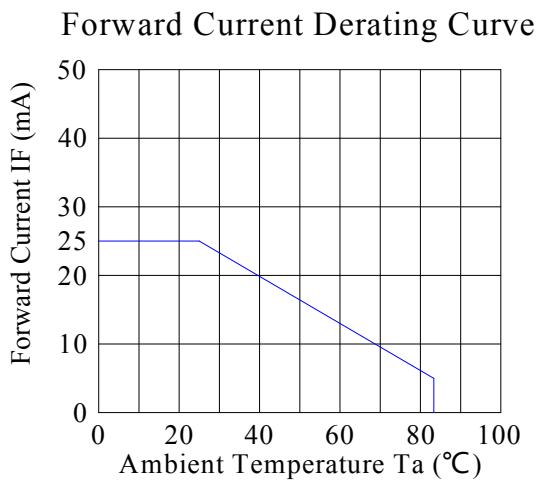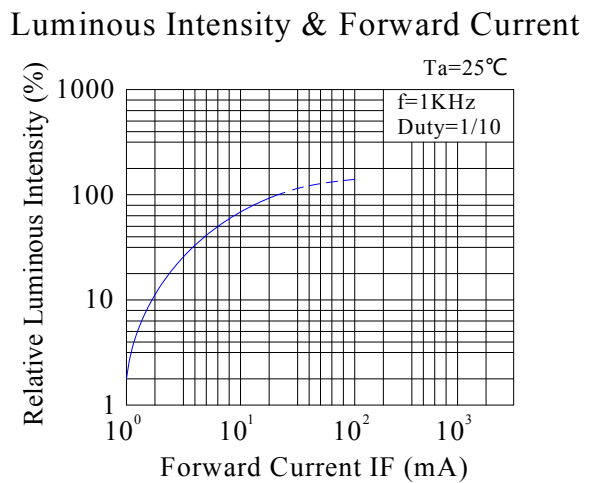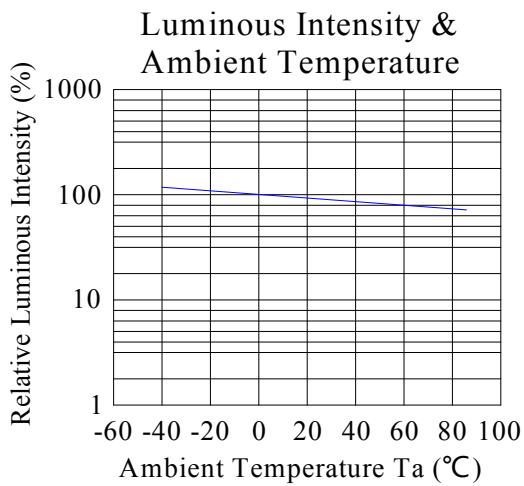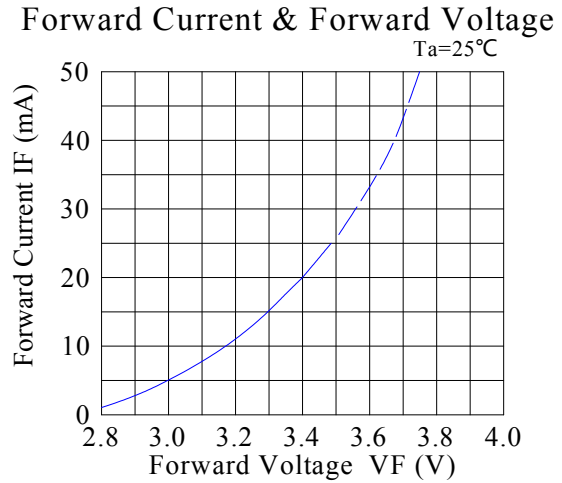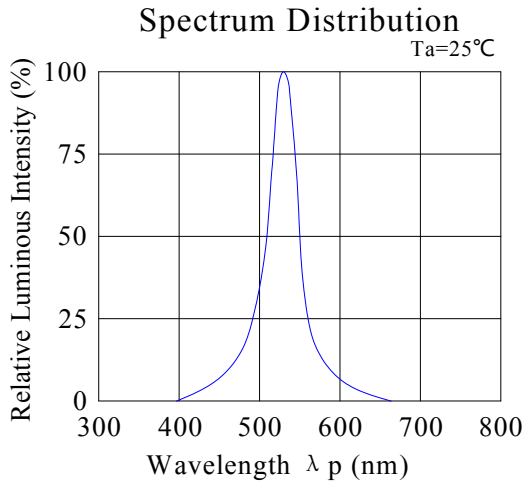

R3528BRGBC-001







3.5x2.8mm, Multi-color LED

Surface Mount PLCC-6 LED Indicator



Technical Data Sheet

Blue:

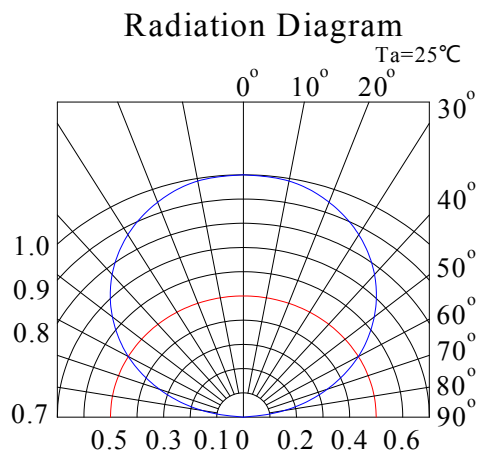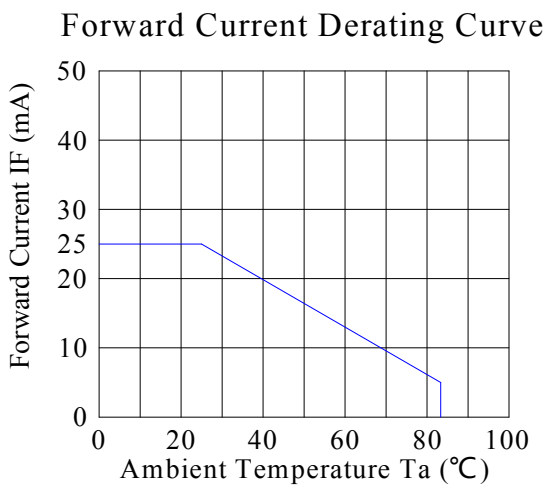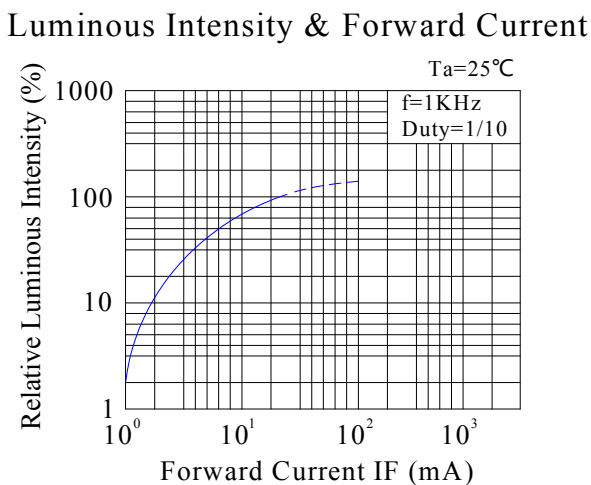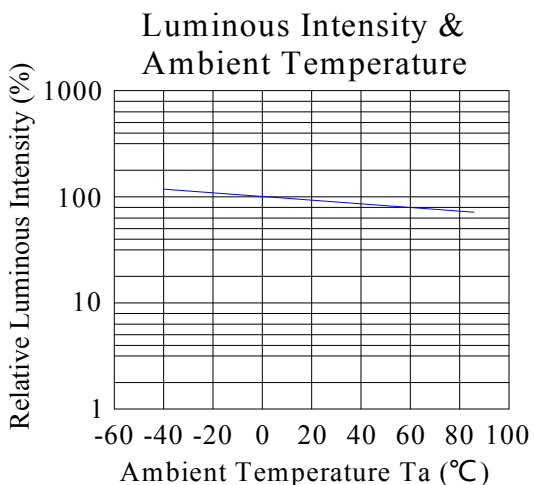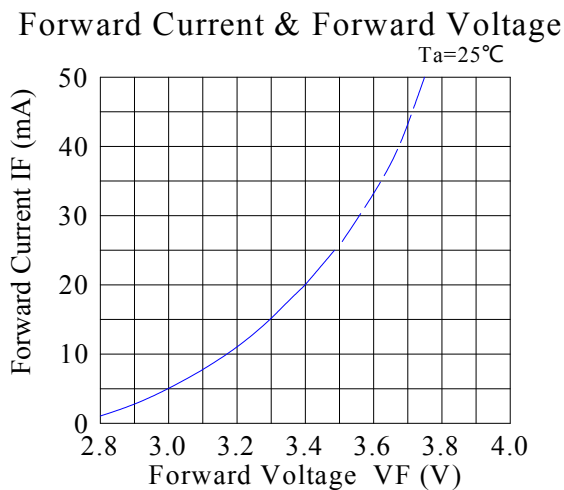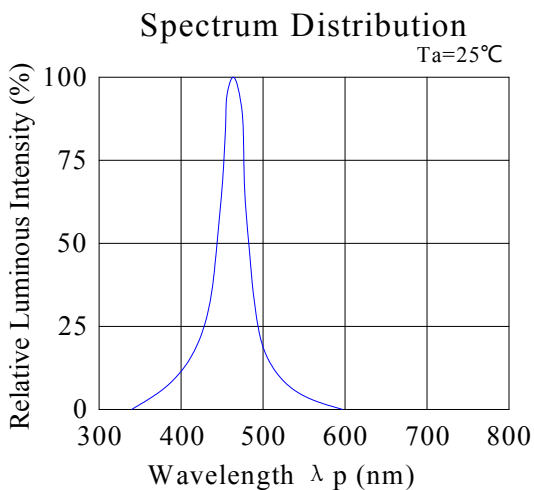

R3528BRGBC-001


3.5x2.8mm, Multi-color LED

Surface Mount PLCC-6 LED Indicator



Technical Data Sheet


Reel Dimensions:

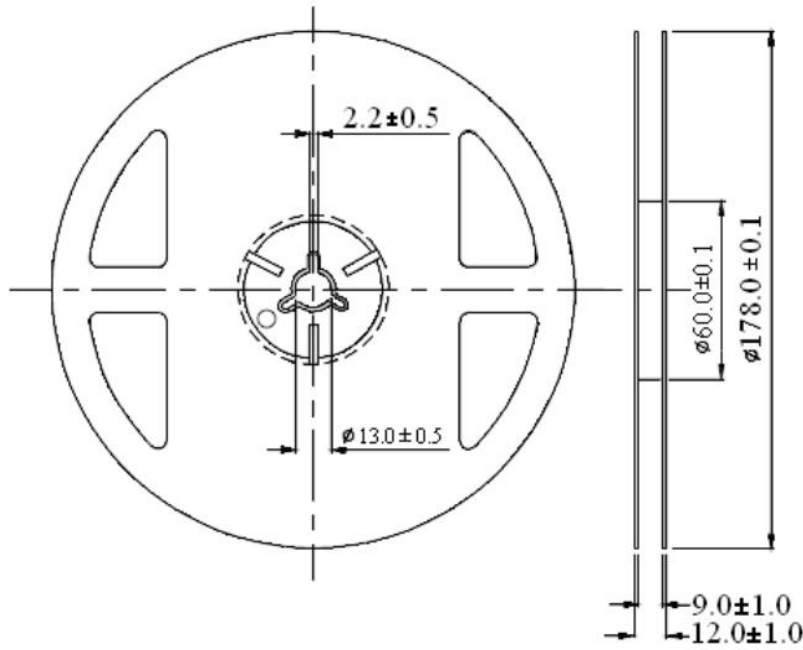

Unit: mm
Tolerance: ± 0.25mm

Carrier Tape Dimensions:

Loaded quantity 2000 pcs per reel.

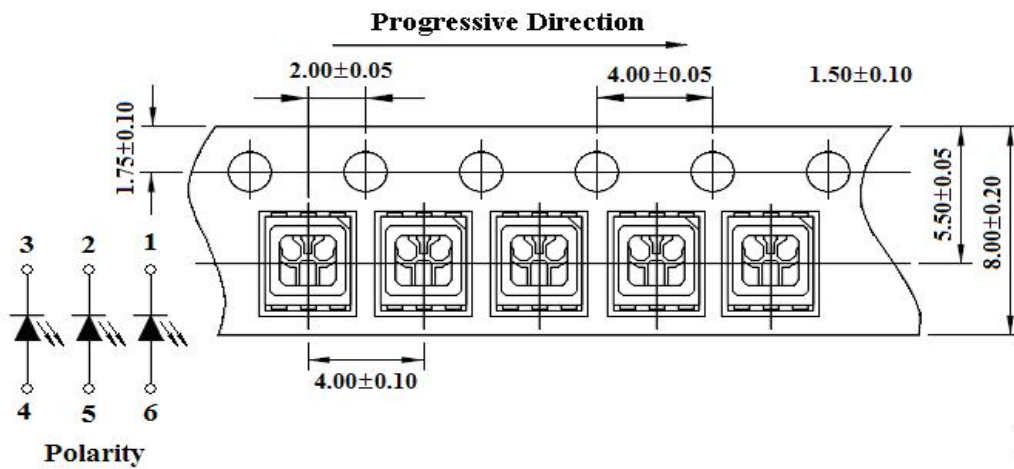

Spec No.: R3528B

Issue No.: G-Rev-4

LuckyLight Electronics Co., Ltd

Copyright © 2017 LuckyLight All Rights Reserved

Date: 28-Sep-2017

E-mail: sales@luckylight.cn

http:// www.luckylight.cn

Page: 8 / 12

R3528BRGBC-001

3.5x2.8mm, Multi-color LED

Surface Mount PLCC-6 LED Indicator


LuckyLight

Technical Data Sheet

CAUTIONS

1. Handling Precautions:

- 1.1. Handle the component along the side surfaces by using forceps or appropriate tools.
- 1.2. Do not directly touch or handle the silicone lens surface. It may damage the internal circuitry.
- 1.3. Do not stack together assembled PCBs containing exposed LEDs. Impact may scratch the silicone lens or damage the internal circuitry.

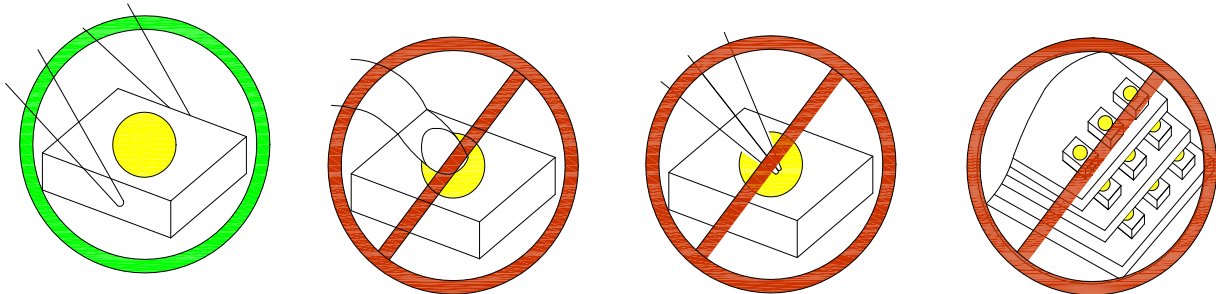

Compare to epoxy encapsulant that is hard and brittle, silicone is softer and flexible. Although its characteristic significantly reduces thermal stress, it is more susceptible to damage by external mechanical force. As a result, special handling precautions need to be observed during assembly using silicone encapsulated LED products. Failure to comply might lead to damage and premature failure of the LED.

2. Storage

- 2.1. Do not open moisture proof bag before the products are ready to use.
- 2.2. Before opening the package, the LEDs should be kept at 30°C or less and 60%RH or less.
- 2.3. The LEDs should be used within a year.
- 2.4. After opening the package, the LEDs should be kept at 30°C or less and 60%RH or less.
- 2.5. The LEDs should be used within 24 hours after opening the package.
- 2.6. If the moisture adsorbent material has fabled away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions. Baking treatment: 65±5°C for 24 hours.

R3528BRGBC-001

3.5x2.8mm, Multi-color LED


Surface Mount PLCC-6 LED Indicator



Technical Data Sheet

3. Soldering Condition

3.1. Pb-free solder temperature profile

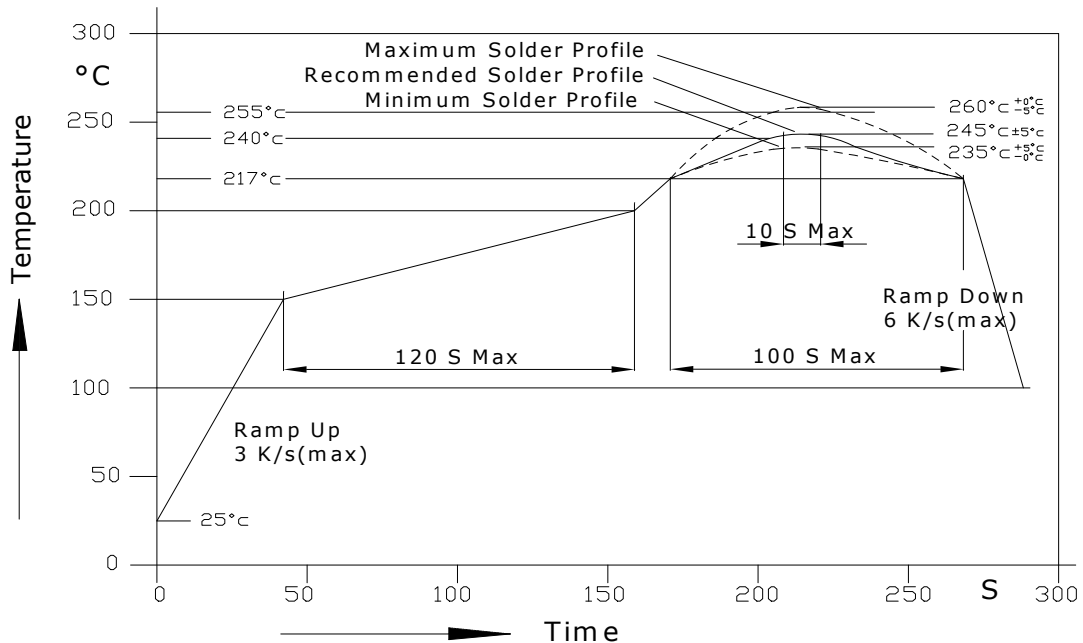

- 3.2. Reflow soldering should not be done more than two times.
- 3.3. When soldering, do not put stress on the LEDs during heating.
- 3.4. After soldering, do not warp the circuit board.
- 3.5. Recommended soldering conditions:

| Reflow soldering | | Soldering iron | |
|------------------|------------------------------|----------------|-----------------|
| Pre-heat | 150~200°C | Temperature | 300°C Max. |
| Pre-heat time | 120 sec. Max. | Soldering time | 3 sec. Max. |
| Peak temperature | 250°C Max. | | (one time only) |
| Soldering time | 10 sec. Max.(Max. two times) | | |

3.6. Because different board designs use different number and types of devices, solder pastes, reflow ovens, and circuit boards, no single temperature profile works for all possible combinations.

R3528BRGBC-001

3.5x2.8mm, Multi-color LED

Surface Mount PLCC-6 LED Indicator


LuckyLight

Technical Data Sheet

However, you can successfully mount your packages to the PCB by following the proper guidelines and PCB-specific characterization.

4. Drive Method

4.1. An LED is a current-operated device. In order to ensure intensity uniformity on multiple LEDs connected in parallel in an application, it is recommended that a current limiting resistor be incorporated in the drive circuit, in series with each LED as shown in Circuit A below.

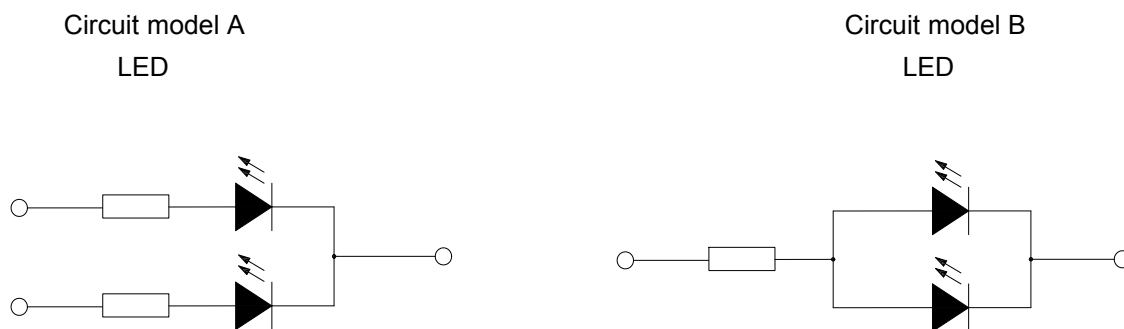

a. Recommended circuit.

b. The brightness of each LED might appear different due to the differences in the I-V characteristics of those LEDs.

5. ESD (Electrostatic Discharge):

Static Electricity or power surge will damage the LED. Suggestions to prevent ESD damage:

- Use of a conductive wrist band or anti-electrostatic glove when handling these LEDs.
- All devices, equipment, and machinery must be properly grounded.
- Work tables, storage racks, etc. should be properly grounded.
- Use ion blower to neutralize the static charge which might have built up on surface of the LED's plastic lens as a result of friction between LEDs during storage and handling.

ESD-damaged LEDs will exhibit abnormal characteristics such as high reverse leakage current, low forward voltage, or "no lightup" at low currents. To verify for ESD damage, check for "lightup" and Vf of the suspect LEDs at low currents. The Vf of "good" LEDs should be >2.0V@0.1mA for InGaN product and >1.4V@0.1mA for AlInGaP product.

R3528BRGBC-001

3.5x2.8mm, Multi-color LED

Surface Mount PLCC-6 LED Indicator



Technical Data Sheet

Terms and conditions for the usage of this document

1. The information included in this document reflects representative usage scenarios and is intended for technical reference only.
2. The part number, type, and specifications mentioned in this document are subject to future change and improvement without notice. Before production usage customer should refer to the latest datasheet for the updated specifications.
3. When using the products referenced in this document, please make sure the product is being operated within the environmental and electrical limits specified in the datasheet. If customer usage exceeds the specified limits, LuckyLight will not be responsible for any subsequent issues.
4. The information in this document applies to typical usage in consumer electronics applications. If customer's application has special reliability requirements or have life-threatening liabilities, such as automotive or medical usage, please consult with LuckyLight representative for further assistance.
5. The contents and information of this document may not be reproduced or re-transmitted without permission by LuckyLight.